

# Hampton Bay 3-Light Outdoor Flemish Lantern Wall Mount



## Description

The Hampton Bay Wall-Mount 3-Light Outdoor Flemish Lantern boasts classic styling in a bronze finish that matches it well to many architectural styles. It has clear seeded-glass panels that provide a soft glow. Weather resistant for outdoor use, this fixture includes 3 candelabra bulbs for added value and convenience.

- Robust steel construction finished in a Flemish bronze
- Clear seeded-glass panes for bright and shimmering diffusion
- Classic coach-style lantern with simple contours
- Wall-mount design is great for facades, porches, patios and columns
- Weather-resistant housing helps ensure a long service life
- Uses three 60-watt candelabra bulbs (included)
- MFG Brand Name : Hampton Bay
- MFG Model # : HD295090
- MFG Part # : Y38003STL-197

## Specifications

- **Assembled Depth (in.):** 10.0 in
- **Assembled Height (in.):** 18.5 in
- **Assembled Width (in.):** 9.0 in
- **Bulb Type:** Incandescent
- **CSA Listed:** No

- **Color/Finish:** Flemish
- **Dusk to Dawn:** No
- **ETL Listed:** No
- **Energy Star Compliant:** No
- **Exterior Lighting Product Type:** Wall Mount Light
- **Fixture Finish:** Flemish
- **Fixture Material:** Steel, Glass
- **Glass/Lens Type:** Seedy
- **Light Source:** Incandescent
- **Manufacturer Warranty:** N/A
- **Maximum Bulb Wattage:** 60.0 W
- **Motion Sensor:** No
- **Number of Bulbs Required:** 3
- **Product Height (in.):** 18.5 in
- **Product Length (in.):** 10 in
- **Product Weight (lb.):** 10.58 lb
- **Product Width (in.):** 9 in
- **Returnable:** 90-Day
- **Size:** Medium
- **Solar Powered:** No
- **Style:** Classic
- **Weather Resistant:** Yes



## OUTDOOR FIXTURE INSTALLATION INSTRUCTIONS

*Please read carefully and save these instructions, as you may need them at a later date.*

### CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

### GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


### ASSEMBLY AND INSTALLATION

1. Thread the #8-32 HEX NUTS (5) onto the #8-32 FIXTURE MOUNTING SCREWS (2), and screw the SCREWS (2) onto the MOUNTING BRACKET (3), without tightening the #8-32 HEX NUT (5).
2. Pull the power supply wires out from the OUTLET BOX (1), and mount the MOUNTING BRACKET (3) to the OUTLET BOX (1), using MOUNTING SCREWS (4).
3. Place the BACK PLATE (13) of the fixture over the OUTLET BOX (1) and onto the FIXTURE MOUNTING SCREWS (2), and adjust the HEX NUTS (5) until it protrudes 1/4" out from the BACK PLATE (13). Remove the BACK PLATE (13) and secure the position of the SCREWS (2) by tightening the HEX NUT (5) against the MOUNTING BRACKET (3).
4. Attach the BLACK SUPPLY WIRE (9) to the BLACK FIXTURE LEAD WIRE (10) by using the WIRE CONNECTOR (8). In the same manner, attach the WHITE SUPPLY WIRE (7) to the WHITE FIXTURE LEAD WIRE (12). Connect the FIXTURE GROUND WIRE (11) to the POWER SUPPLY GROUND WIRE (6) using a WIRE CONNECTOR (8).
5. Place the BACK PLATE (13) back onto the FIXTURE SCREWS (2), and secure into place using the DECORATIVE NUTS (14) provided.

### ASSEMBLY AND INSTALLATION (Continued)

6. Slide the candle cover onto the socket, Screw light bulbs into the threaded sockets and make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.

INSTALLATION IS NOW COMPLETED

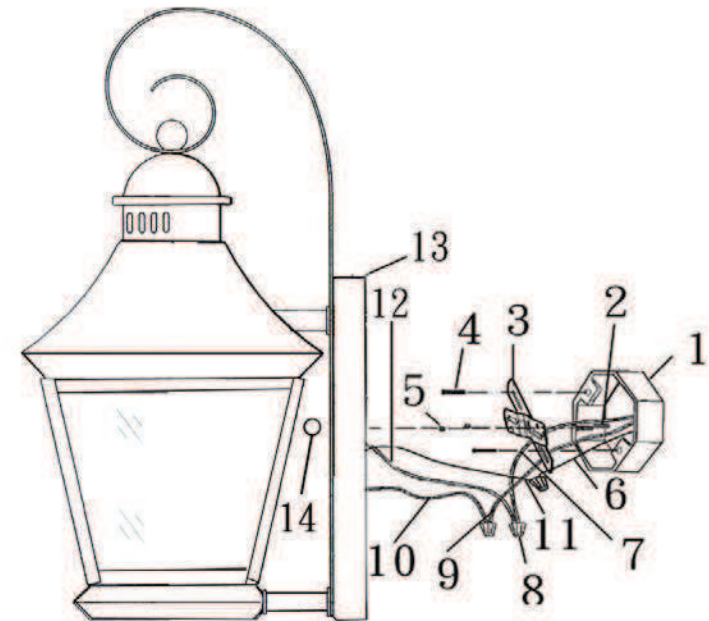

- |                                 |                             |
|---------------------------------|-----------------------------|
| 1. OUTLET BOX                   | 9. BLACK SUPPLY WIRE        |
| 2. #8-32 FIXTURE MOUNTING SCREW | 10. BLACK FIXTURE LEAD WIRE |
| 3. MOUNTING BRACKET             | 11. FIXTURE GROUND WIRE     |
| 4. MOUNTING SCREW               | 12. WHITE FIXTURE LEAD WIRE |
| 5. #8-32 HEX NUTS               | 13. BACK PLATE              |
| 6. POWER SUPPLY GROUND WIRE     | 14. DECORATIVE NUT          |
| 7. WHITE SUPPLY WIRE            |                             |
| 8. WIRE CONNECTOR               |                             |